



A product of
R&D Workshop
League City, TX

SPECIAL ORDER INSTRUCTIONS


Do It Best Vendor # 2794

Trim-A-Slab is a product of R&D Workshop


Made in U.S.A.




3/16




1/2

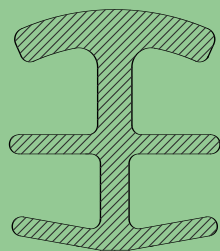

3/4



1

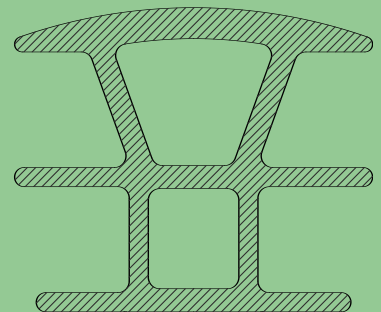
















1-3/8

**SIZE
CHART**
(actual size)

Trim-A-Slab is sized to match **the GAP being filled**. The crown will measure greater than the size (a $\frac{3}{4}$ " size Trim-A-Slab measures a little over 1 inch across the top). This keeps Trim-A-Slab from falling into the gap.

TRIM-A-SLAB

Product Description		UPC	Coil length	MSRP
3/16" grey		8 56857 00326 4	500'	\$ 234.00
1/2" Black		8 56857 00308 0	50'	\$ 74.50
1/2" Grey		8 56857 00307 3		\$ 74.50
1/2" Walnut		8 56857 00311 0		\$ 74.50
3/4" Black		8 56857 00302 8	50'	\$ 124.50
3/4" Grey		8 56857 00301 1		\$ 124.50
3/4" Grey		8 56857 00315 8	25'	\$ 62.25
3/4" walnut		8 56857 00310 3	50'	\$ 124.50
1" Black		8 56857 00303 5	25'	\$ 87.25
1" Grey		8 56857 00304 2		\$ 87.25
1" Walnut		8 56857 00312 7	25'	\$ 87.25
1-3/8" Black		8 56857 00306 6	25'	\$ 124.50
1-3/8" Grey		8 56857 00305 9		\$ 124.50
1-3/8" Walnut		8 56857 00313 4	25'	\$ 124.50

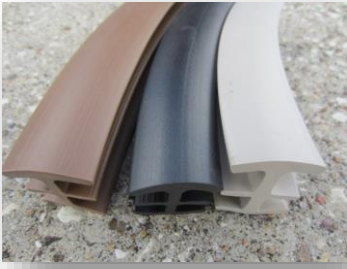

3 colors are standard: Black, Walnut, and Grey. Grey will be the best match to clean, dry concrete. Grey and Walnut may show tire marks and dirt, but can be easily cleaned with soap and water.

How to install Trim-A-Slab



Press in;
typically can be
pressed in by
hand



Cuts easily with
pruning shears
or a PVC cutter

1. Clear gap so no contact occurs below



2. Make Contact with the slab on both sides
3. Cut to length; That's it!

Applications: Driveways, sidewalks, patios, pool decks...between two concrete slabs, or between slabs and foundations. Trim-A-Slab is intended for use between rounded-edge slabs. Use on sharp-edged slabs should be evaluated by the end-user, as the crown will sit on top of the slab, and may produce a trip hazard.

For **technical support** please call:

Greg 832-428-8096

Bob 281-910-5511